



N-BM20

BUILT AS BASIC



Finger



RFID



Inbuilt Battery



LAN




USB

Fingerprint Time & Attendance

Storage Capacity

Finger Capacity	1000
Card Capacity	1000
Max User	1000
Password	1000
Log Capacity	1,50,000

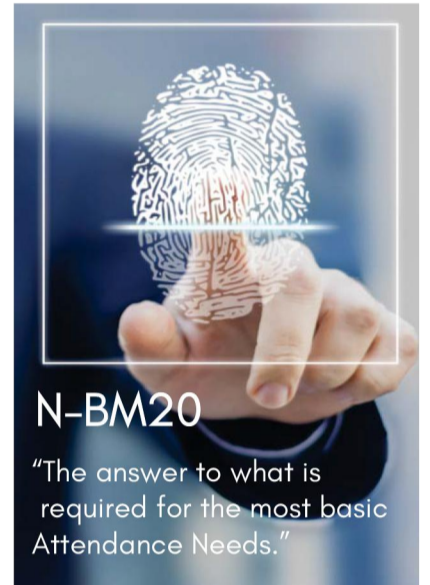

Features

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

www.biomaxsecurity.com

Communication Interface

Communication	TCP/IP, USB
---------------	-------------

Biometric

Push Data	YES (Optional)
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
CPU	Industrial High Speed CPU
Verification Time	<=1 second
RF card options	125kHz EM (Standard) / 13.56MHz Mifare (Optional)



Accepts moist and rough Finger



Accepts Color & Mahendi Finger



TCP/IP, USB



Unaffected by High Temperatures 0° ~ 50°

Audio/Visual

LCD	2.4" TFT color screen 320x240 pixel
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Power & Environment

Inbuilt Battery Backup	YES
Operating Temperature	0°c ~ 50°c
Power	5VDC/1A
Dimension	180 x 130 x 35

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.